

WARRANTY

SureFire warrants our suppressors and suppressor related products to be free from defects in workmanship and materials for the lifetime of the original owner. We will repair, replace, or refund your original purchase price of a product if it is determined by SureFire to be defective. This warranty does not cover normal wear and tear, damage to the suppressor resulting in whole or in part from unauthorized repairs, unstable or non-SAAMI/NATO specification ammunition, abuse, misuse, or neglect. Unwarranted repairs to the suppressor, including but not limited to core rebuilds, made necessary by any of these factors will be invoiced to the owner who will be given the right to approve such work before it commences. BSD's and BFA's are designed to be used with blank ammunition only. Any damage due to live fired rounds is not covered by this warranty and cannot be repaired. SureFire assumes no responsibility whatsoever and will honor no claims for damages, regardless of nature, for physical injury or property damage resulting from careless and/or irresponsible handling, adjustments to the suppressor and/or suppressor related products, neglect or abuse.

DISCLAIMER

The above warranties are exclusive, and to the extent permitted by applicable laws, shall be in lieu of all other warranties, expressed or implied, including, without limitation, any warranty of merchantability or fitness for a particular use or purpose. SureFire disclaims any and all liability for product malfunctions, physical injuries, or property damage that result in whole, or in part, from the criminal, negligent, or improper use of the product: and/ or from modifications or alterations thereto. In no event shall SureFire be liable for any incidental, special, or consequential damages relating to the purchase, use, or performance of any SureFire product.

WARRANTY CLAIMS

For repair or replacement email Technical Support at technicalsupport@surefire.com or contact Customer Service at 800-828-8809 (toll free) or 714-545-9444 and obtain a Return Merchandise Authorization number (RMA#). An initial request for RMA can also be submitted through the link on www.surefire.com. You may be supplied with additional shipping instructions specific to the product being returned. Package the unit carefully and in accordance with all instructions then return to the mailing address provided (no CODs please). SureFire will pay any reasonable shipping costs to return the unit to you. ©2019 SureFire, LLC. All rights reserved.

Revision G 04-2023


71-01-946

PRO-COMP / 3P-ELIMINATOR / WARCOMP SPORT

18300 MT. BALDY CIRCLE
FOUNTAIN VALLEY, CA 92708-6122
WWW.SUREFIRE.COM

SUREFIRE

PATENT NO.
7,954,414
8,205,538

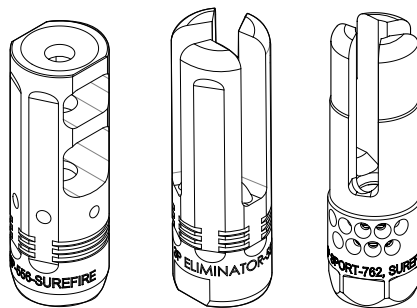

**PROCOMP MUZZLE BRAKE
3P ELIMINATOR FLASH HIDER
WARCOMP SPORT FLASH HIDER**

MUZZLE DEVICES (NON-SUPPRESSOR COMPATIBLE)

USER MANUAL

MUZZLE DEVICES

INTRODUCTION

SureFire PROCOMP muzzle brake, 3P ELIMINATOR and WARCOMP SPORT flash hidere are designed to fit 5.56/.223 or 7.62/.308 caliber weapons with 1/2-28 or 5/8-24 muzzle threads, and function as stand-alone muzzle devices that **will not accept any SureFire suppressor**. The PROCOMP muzzle brake reduces both recoil impulse and muzzle rise, helping to achieve exceptional on-target stability. The 3P ELIMINATOR and WARCOMP SPORT are three-prong flash hidere that reduce more than 99% of muzzle flash. All SureFire muzzle devices are machined from USA mill-certified chromoly steel bar stock, come with precision cut threads, and are black nitride coated for durability.

KIT CONTENTS

- Muzzle device
- Crush Washer
- User Manual

WARNING

ALWAYS confirm weapon is unloaded and on SAFE before attempting installation.

INSTALLATION

1. Secure the barrel and upper receiver of host weapon in a vise or comparable holding fixture.
2. Referring to host weapon user manual, remove existing flash hider/muzzle brake, spacers, shims and/or washers from host weapon. DO NOT reuse the shims, spacers or washers removed from host weapon.

3. Install the crush washer onto the muzzle of the host weapon with the large-tapered surface facing the muzzle device (Fig. 1).




FIGURE 1

4. Thread the muzzle device onto the muzzle until hand tight.
5. Using a 3/4 inch wrench for PROCOMP & 3P-ELIMINATOR, or 13/16 inch wrench for WARCOMP SPORT, tighten the muzzle device down a minimum of 90° but not more than 450° until it is bottom dead center (BDC). DO NOT over tighten the muzzle device.

Note: Bottom dead center is achieved when the blind hole at the rear of the muzzle device is timed at the 6 o'clock position.
6. **DIRECTIONAL CLOCKING FOR WARCOMP SPORT MODELS ONLY.** WARCOMP SPORT flash hidere can be clocked in different positions as shown below to improve muzzle rise mitigation for right- or left-handed shooters or set in the neutral position.

